

### **KROMATON®** ROUSSELET CENTRIFUGATION **GROUP**

# FCPC®

# KROMATON

Since 1999 Kromaton has pioneered in developing Fast Centrifugal Partition Chromatography (FCPC<sup>™</sup>) systems for the separation and purification of complex mixtures of natural, synthetic or biological/biotechnological origin.

### KROMATON IS THE WORLD MARKET LEADER IN CENTRIFUGAL PARTITION CHROMATOGRAPHY (CPC)

with more than 130 systems operating around the globe.

Kromaton's technological expertise is powered by Rousselet Robatel know-how in designing and manufacturing industrial centrifugal systems made of stainless steel.

This guarantees effectiveness and robustness through state-ofthe- art design.

WWW.KROMATON.COM WWW.ROUSSELET-ROBATEL.COM

### MARKETS/SECTORS OF ACTIVITY

## Natural compounds / ingredients of plant origin (Reference standards, APIs, Nutraceuticals, Nutrients, Cosmetics etc.) Synthetic compounds (APIs, Specialty chemicals, Pesticides etc.) WHAT IS FCPC ?

**Fast Centrifugal Partition Chromatography** (FCPC<sup>™</sup>) is a liquid/liquid purification technology for highadded-value compounds and molecules.

It is a preparative chromatography technique based on the principle that both mobile and stationary phases are liquid. This, a biphasic solvent system is utilized and the stationary phase is maintained in the column by centrifugal force, while mobile phase percolates through, thus presenting several advantages in comparison with conventional chromatography techniques :

- No solid packing material to dispose.
- High stationary phase ratio in the column.
- No sample loss due to irreversible adsorption.
- No denaturation of sensitive compounds.
- High throughput capacity.
- Moderate solvent consumption.

- Wide range of possible applications
- in terms of polarity.
- Easy and predictable scale-up.
- Versatile operation (elution/extrusion, normal/reverse-phase, pH-zonerefining, ion-exchange, dual mode, gradient elution, etc).

## PRINCIPLE OF OPERATION

#### Centrifugal Partition Chromatography operation relies on a simple principle.


#### A biphasic solvent system is the core of this operation :

• One phase is selected to act as a stationary phase, either the lighter or the heavier. This is achieved by centrifugal force.

• The other phase is continuously percolating through, thus acting as the mobile phase. This is achieved by a pumping system.

**The solutes of interest** are introduced into the chromatographic column and are migrating along its length according to their distribution coeffi cient between the mobile and stationary phase.

**The column** (also called rotor) is specifically designed with twin-cells and ducts that guarantee optimal surface of contact between the two phases.

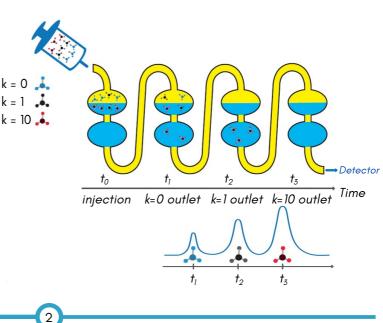



#### FCPC C - LABORATORY SCALE EQUIPMENT

**FCPC C is a benchtop system,** ideal for method development and preparative applications involving small sample quantities, low solvent consumption and faster separations.

Two interchangeable rotors can be mounted on this skid, 25 and 50ml.

| DATA                     | FCPC C25 FCPC C50  |               |  |
|--------------------------|--|---------------|--|
| Rotor/Column volume      | 25 ml 50 ml  |               |  |
| Sample quantity          | 10 - 250 mg  | 10 – 500 mg   |  |
| Flow rate                | 1 – 10 ml/min  | 1 – 10 ml/min |  |
| Separation time          | 5 – 30 min   |               |  |
| Pressure max.            | 80 bars / 1,160 psi  |               |  |
| Rotation speed max.      | 3,000 rpm  |               |  |
| Size/Weight power        | 300 x 300 x h 555 mm/40 kg<br>750W - 110 or 220 VAC        |               |  |
| Material of construction | Rotor: Stainless steel + PTFE.<br>Housing: Stainless steel |               |  |

#### FCPC A - VERSATILE & SCALABLE EQUIPMENT

**FCPC A is a benchtop system,** ideal for method development as well as preparative applications with upscalable results and manual or automated control powered by an integrated LC station.

| DATA                     | FCPC A25  | FCPC A50   | FCPC A200    | FCPC A1000  |
|--------------------------|---|------------|--------------|-------------|
| Rotor/Column volume      | 25 ml   | 50 ml      | 200 ml       | 1,000 ml    |
| Sample quantity          | 10-250mg  | 10-500mg   | 100mg-5g     | 1g-30g      |
| Flow rate                | 1–10ml/min  | 1–10ml/min | 10-50ml/min  | 10-80ml/min |
| Separation time          | 5 - 20 min  |            | 30 – 180 min |             |
| Pressure max.            | 80 bars / 1,160 psi   |            |              |             |
| Rotation speed max.      | 3,000 rpm   |            |              | 2,000 rpm   |
| Size/Weight power        | 630 x 437 x h 630 mm/115 kg<br>750W - 110 or 220 VAC                            |            |              |             |
| Security                 | Emergency stop, Overpressure,<br>Solvent Retention Tank, Cooling System         |            |              |             |
| Material of construction | Rotor: Stainless steel + PTFE.<br>Housing: Stainless steel                      |            |              |             |
| Options                  | Biocompatible version (titanium).<br>Reduced cell number for higher throughput. |            |              |             |

Additionally it can take a Centrifugal Partition Extractor rotor (CPE) of **300ml** total volume.

3

FCPC C is Kromaton's dubget solution for feasibility studies and research



FCPC A is Kromaton's most versatile system: four interchangeable rotors, 25, 50, 200 and 1,000ml, can be mounted on the same skid




#### FCPC D - INDUSTRIAL PRODUCTION SYSTEM

FCPC D is Kromaton's GMP-compatible Production system, for large-scale purifi - cation. It is delivered with automated control powered by an integrated LC station. It can take two interchangeable rotors, of 5 and 10L volume and can be manufactured in an ATEX version.

| DATA                     | FCPC D5000  | FCPC D10000  |  |
|--------------------------|---|--------------|--|
| Rotor/Column volume      | 5 liters  | 10 liters    |  |
| Sample quantity          | 50-500  | 100-000      |  |
| Flow rate                | 700 ml/min  | 1,500 ml/min |  |
| Separation time          | 2 to 4 hours  |              |  |
| Pressure max.            | 60 bars / 870 psi   |              |  |
| Rotation speed max.      | 1,400 rpm   |              |  |
| Dimensions               | 1,710mm x 1,160mm x 1,480mm (height)                                    |              |  |
| Poids                    | 1,400 kg  | 1,600 kg     |  |
| Puissance                | 5.5 kW − 400 V  |              |  |
| Material of construction | Stainless steel 316 L / PEEK / PTFE                                     |              |  |
| Housing Material         | Stainless steel 316 L   |              |  |
| Options                  | FCPC version with reduced cell number for<br>higher throughput.<br>ATEX |              |  |





SOLVENT SYSTEMS

Non aqueous systems for apolar applications.

**Medium polarity Ternary/Quaternary** System families (Arizona, ChMW, etc.)

Aqueous for polar applications.

#### FAST CENTRIFUGAL PARTITION CHROMATOGRAPHY

